

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B

A

D




C

B

A



1 : 2

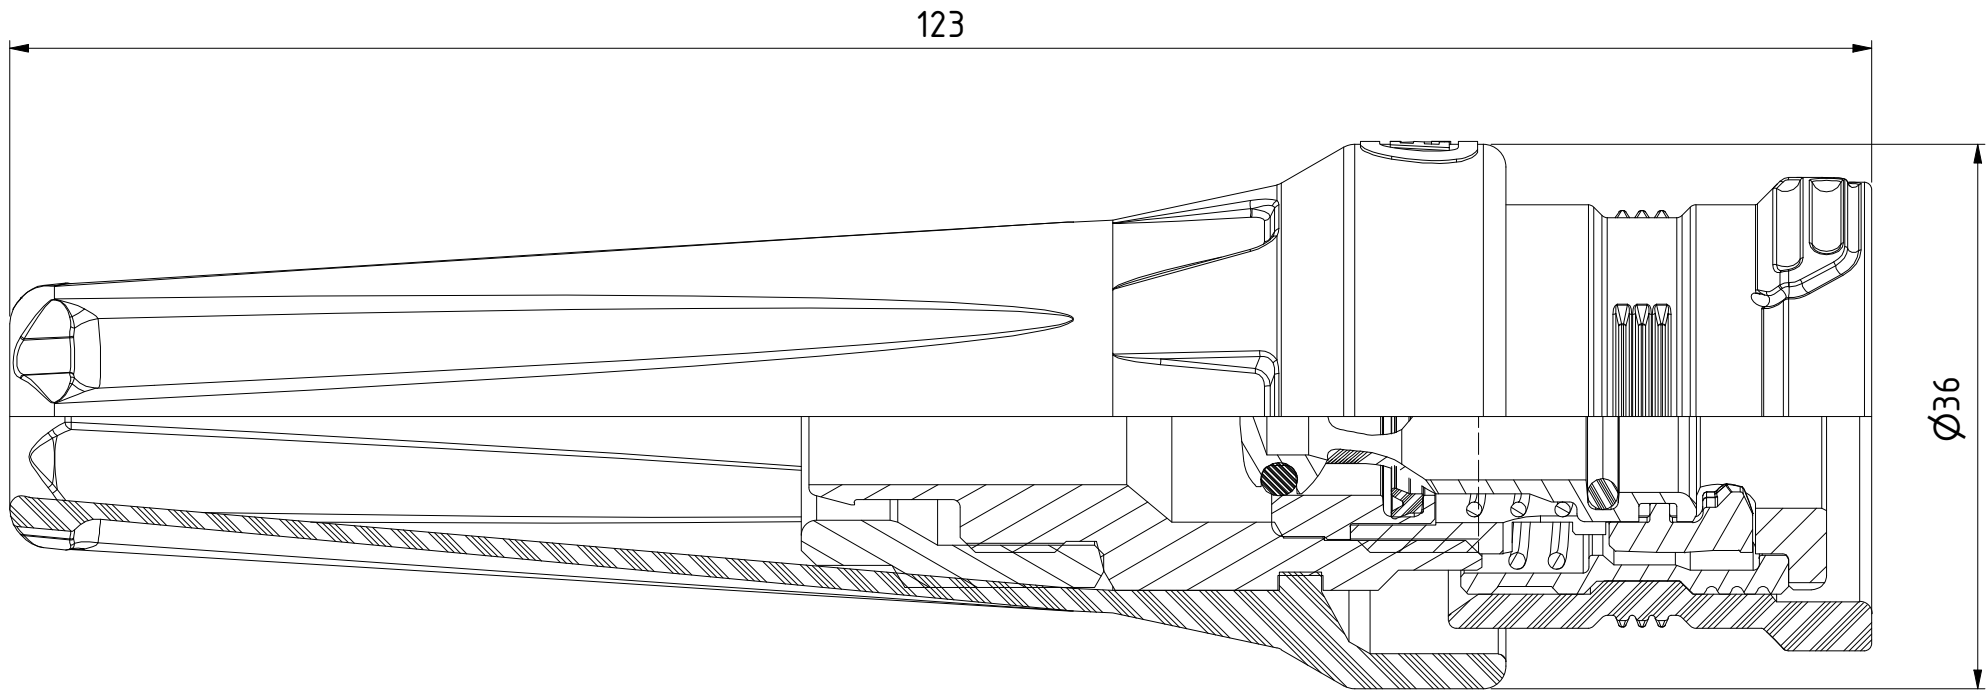

Connection stroke

14	1	O-ring	NBR
13	1	Valve	Aluminium Lead Free
12	2	Hook	Hard. Steel, Zn-Ni 8 transp.
11	1	Front part	Hard. Steel, Zn 8 silver
10	1	Back Part Cover	Rubber
9	1	Locking Sleeve Cover	Rubber
8	1	Swivel nut 9,5x13,5	Steel, Zn 8 silver
7	1	Back part	Aluminium
6	1	Spring	Stainless steel
5	1	Locking sleeve	Hard. steel, Zn 8 Silver
4	1	Spring	Stainless steel
3	1	O-ring	NBR
2	1	Lip seal	NBR
1	1	Valve seat	Aluminium Lead Free

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
Approved		OSJO	Date
			2025-05-08
ECO		Former No.	Scale
002136			2 : 1
Drawing No.		Issue	Sheet
103202083		C	1 /(1)



Coupling Stream-Line 9,5 x 13,5 mm NBR - eSafe, Soft-Line

Product No.	103202083
Nominal flow Ø DN:	7,6 mm
Connection Stroke:	19,2 mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 9,5x13,5
Sealing material:	NBR
Hexagon:	21