

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B

A

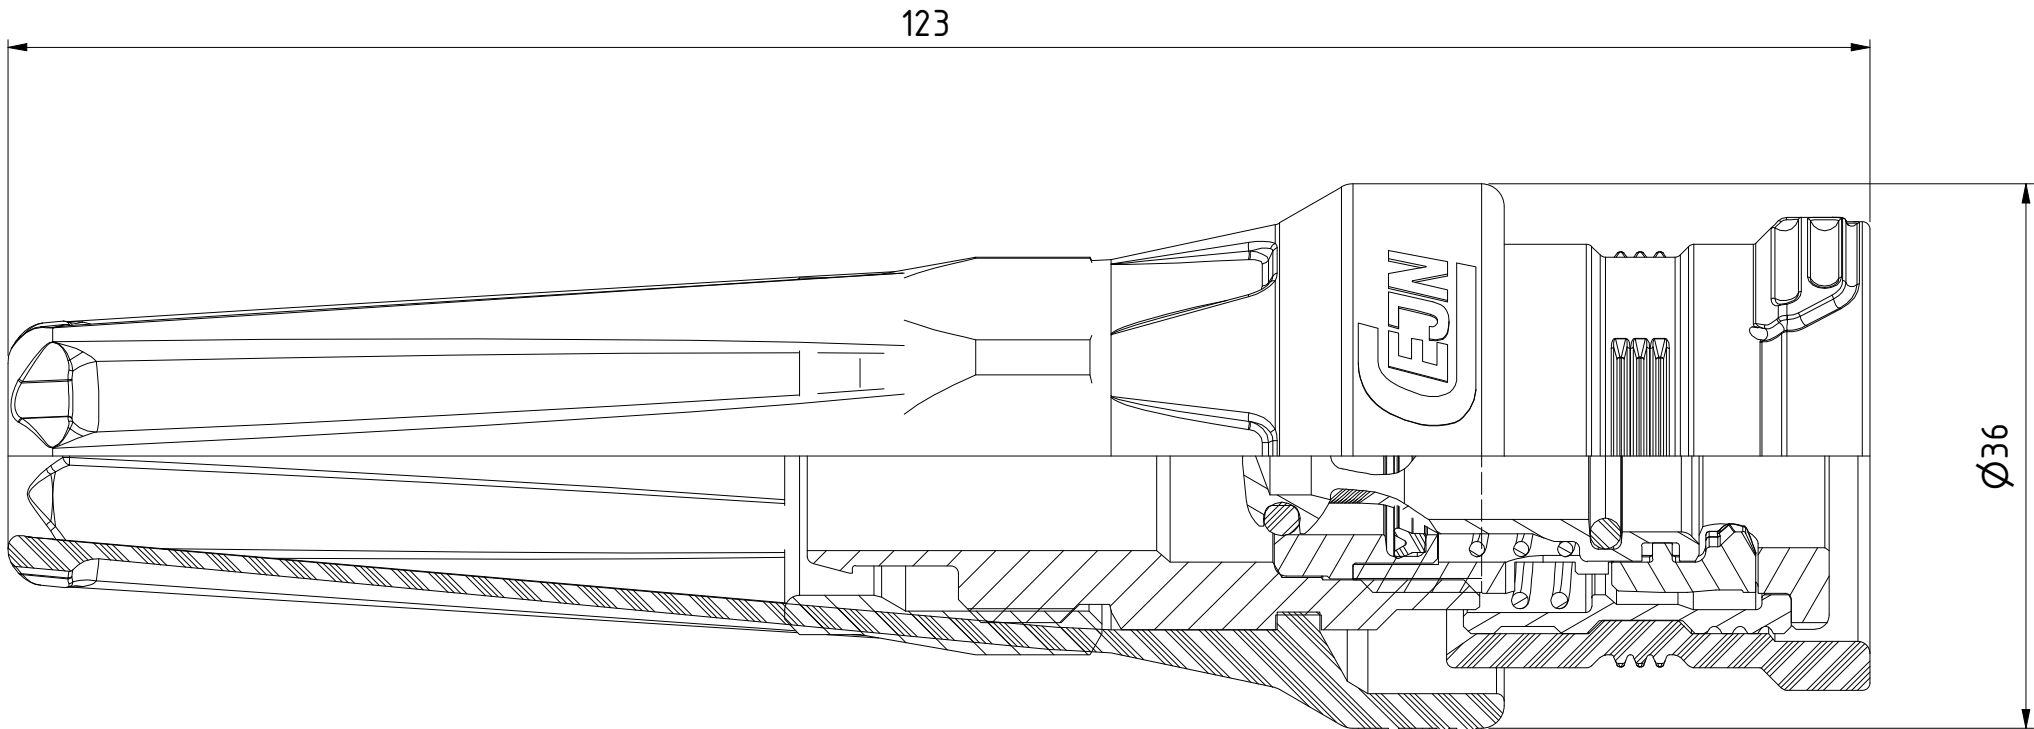

1 : 2



Connection stroke

14	1	Back Part Cover	Rubber
13	1	Locking Sleeve Cover	Rubber
12	1	Spring	Stainless steel
11	1	Spring	Stainless steel
10	1	Lip seal	NBR
9	1	Valve seat	Aluminium Lead Free
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	Valve	Aluminium Lead Free
5	1	Locking sleeve	Hard. steel, Zn 8 Silver
4	2	Hook	Hard. Steel, Zn-Ni 8 transp.
3	1	Front part	Hard. Steel, Zn 8 silver
2	1	Swivel nut 13x18	Steel, Zn 8 Silver
1	1	Back part	Aluminium

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
ECO		Approved	Date
002136		OSJO	2025-05-08
Former No.		Scale	
		2:1	
Drawing No.		Issue	Sheet
103202088		D	1 /(1)



Coupling Stream-Line 13 x
18 mm NBR - eSafe,
Soft-Line

103202088

Product No. 103202088

Nominal flow Ø DN: 7,6 mm
Connection Stroke: 19,2 mm
Max WP Connected: 10 bar w. CEJN braided PUR hose
Min BP Connected: 40 bar w. CEJN braided PUR hose
Temperature range: -20°C - +100°C
Connection: Stream-Line 13x18
Sealing material: NBR
Hexagon: 21/24