

CAD system: Inventor
All rights reserved
This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

Ø32


71

C

C



Connection stroke

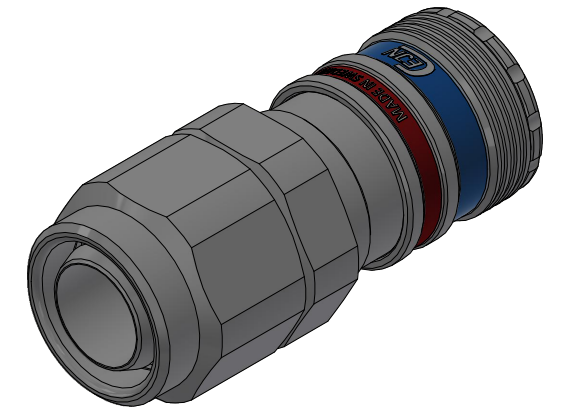

1 : 1

D

C

B

A

Product No.	104102071
Nominal flow Ø DN:	10,4 mm
Connection Stroke:	18,9 mm
Max WP Connected:	10 bar w. CEJN braided PUR hose
Min BP Connected:	40 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 16x21
Sealing material:	NBR
Hexagon:	30

13	1	Valve seat	Aluminum Lead Free
12	1	Stream-line nut 16x21	Steel, Plated
11	1	Spring	Stainless Steel
10	1	Spring	Stainless Steel
9	1	Lip seal	NBR
7	1	Quad-Ring	NBR
6	1	O-ring	NBR
5	1	Valve	Aluminum Lead Free
4	1	Locking sleeve	Hard. Steel, Zn 8 silver
3	3	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver
Item	Qty	Description	Material

State	Drawn	Checked	Approved	Date
Production	CABLIJA	ALAL	OSJO	2025-02-04
ECO		Former No.		Scale
002136				3 : 1
Drawing No.			Issue	Sheet
104102071			C	1 /(1)



Coupling Stream-Line 16 x
21 mm - eSafe