

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3


A

B



C

D

Product No. 104102085	
Nominal flow Ø DN:	10,4 mm
Connection Stroke:	18,9 mm
Max WP Connected:	12 bar w. CEJN braided PUR hose
Min BP Connected:	48 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 11x16
Sealing material:	NBR
Hexagon:	24

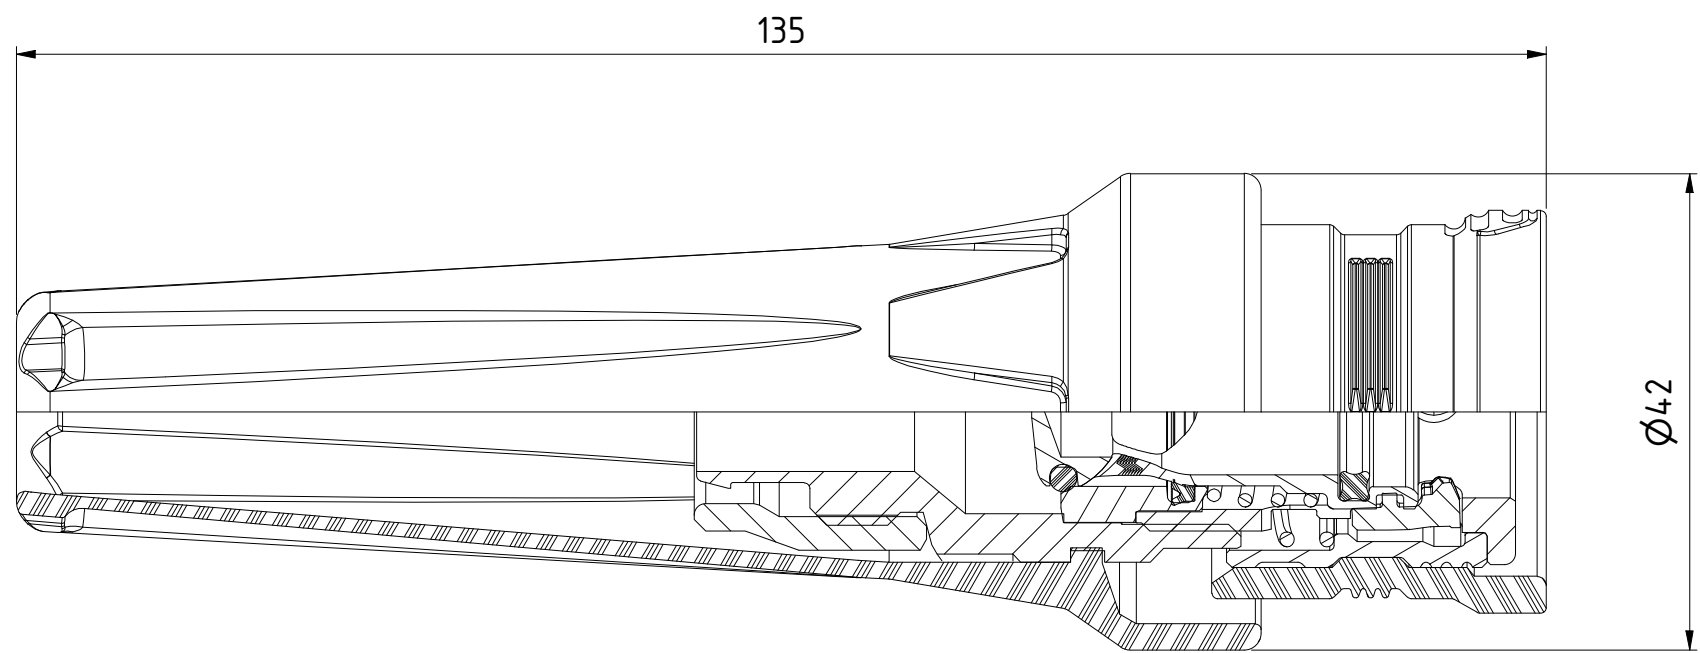

1 : 2

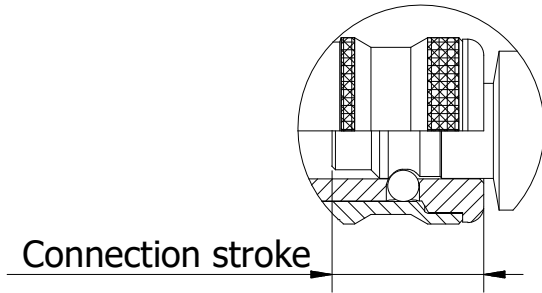

Connection stroke

14	1	Back Part Cover	Rubber
13	1	Locking Sleeve Cover	Rubber
12	1	Swivel nut 11x16	Steel, Zn 8 Silver
11	1	Back part 11x16	Aluminium
10	1	Valve	Aluminum Lead Free
9	1	Valve seat	Aluminum Lead Free
8	1	Spring	Stainless Steel
7	1	Spring	Stainless Steel
6	1	Lip seal	NBR
5	1	Quad-Ring	NBR
4	1	O-ring	NBR
3	1	Locking sleeve	Hard. Steel, Zn 8 silver
2	3	Hook	Hard. Steel, Zn-Ni 8 transp.
1	1	Front part	Hard. Steel Zn 8 Silver
Item	Qty	Description	Material
State Production		Drawn CABLIJA	Checked ALAL
		Approved OSJO	Date 2025-02-07
		ECO 002136	Former No.
		Drawing No. 104102085	Scale 3 : 2
		Issue C	Sheet 1 /(1)