



Hose reel

Shop-display instruction



Find more information about hose and cable reels at www.cejn.com.


GB



Edition A - 2025-11-11

CEJN AB
Rattvägen 1
SE-549 37 Skövde, Sweden
www.cejn.com

1. Assemble display stand

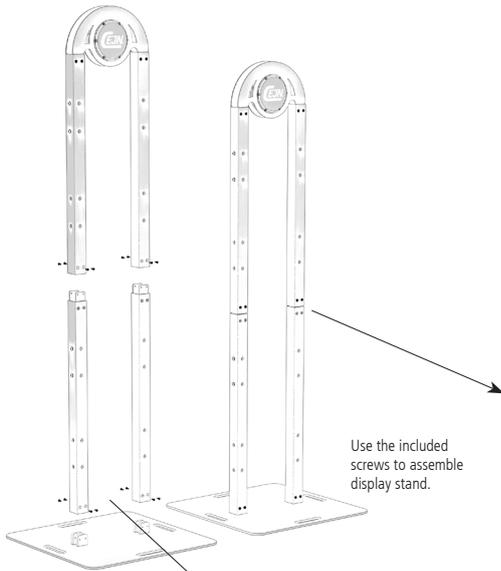

Use the included screws to assemble display stand.

2. Brackets


19 999 0139
Brackets to mount open hose reels in series 913 (sizes midi and midi+). Note: Purchased separately.




The bracket screws

Use included screws to mount brackets to the stand, but don't tighten screws until the reel is mounted to the brackets.

Use the M10 bolts, washer and nuts to mount the reels to the brackets.




Note: The brackets can be mounted in different positions, use the ones that suits your needs best.

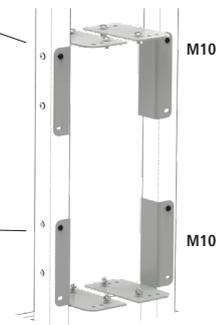


3. Install the reels

Use the M10 bolts, washer and nuts to mount the reels to the brackets.
Make sure the hose guide arm is positioned as shown.

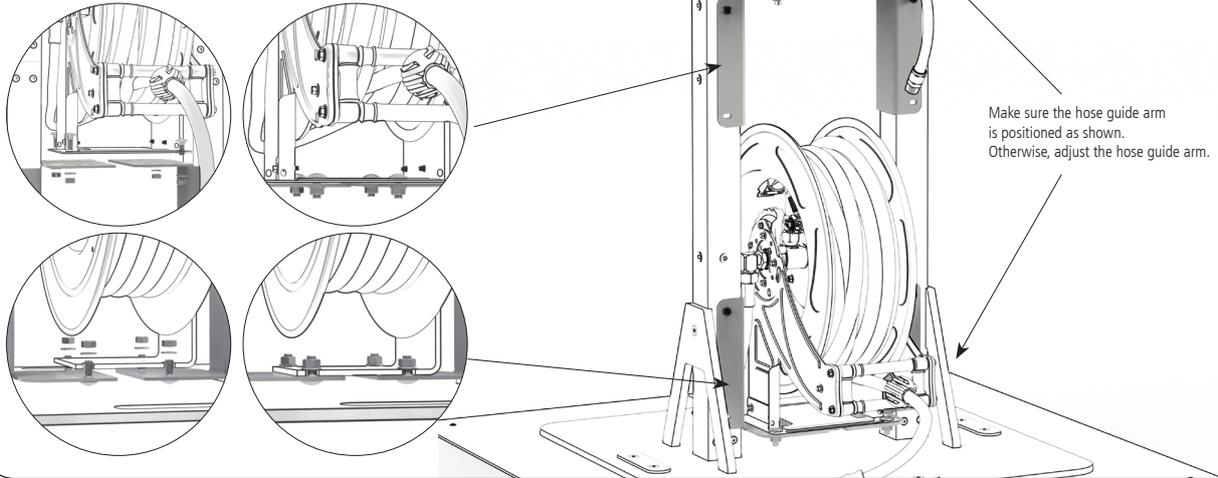


4. Mounting plate

19 911 0102
Mounting plate to assemble CEJN multi-link products and air treatment products on the demo stand.
Note: Purchased separately.

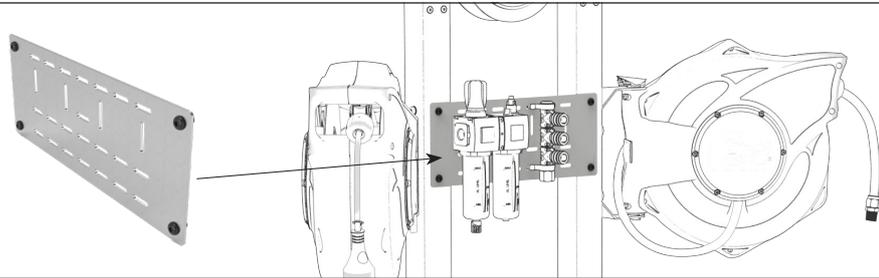

5. Old brackets (2 holes)


- Mount the reel (M10 nuts with washer).
- Tighten the nuts.
- Tighten the bracket screws.
- To mount reels in series 913 on the stand, product 19 913 0101 is needed.

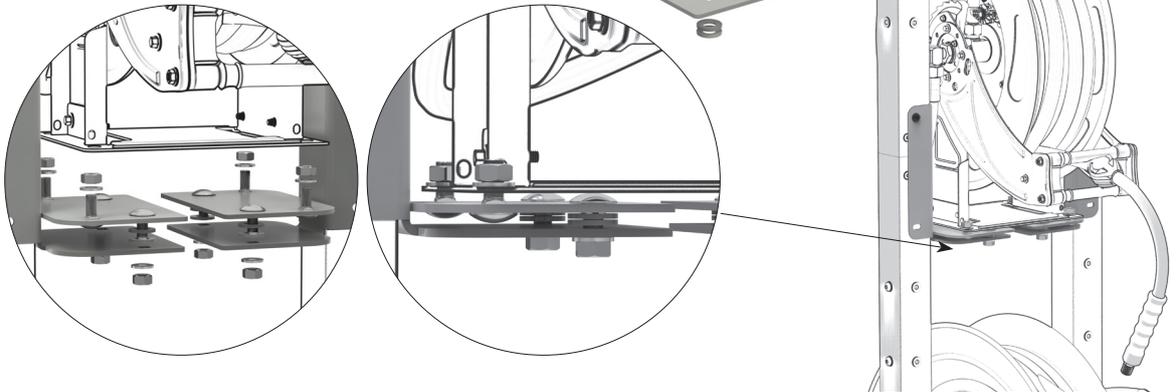

6. Mounting the base plates

Extra side braces for stability.

The two-part base plate is mounted in the existing base plate with 4 parts and screws.

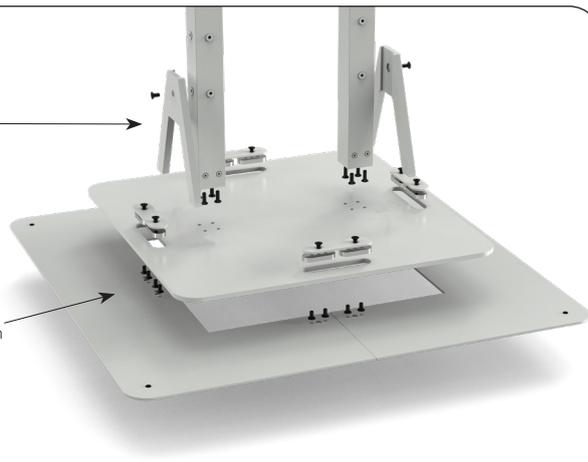

Find more information about hose and cable reels at www.cejn.com.